

FIG. 1 is a cross-sectional view of a device assembly. A central rectangular component (10) is positioned between two circular components (36). A horizontal layer (20) is positioned above the central component. A dashed line (12) indicates a feature within the central component. Various other components are labeled with numbers: 14, 16, 22, 24, 30, 32, 34.

APPROVED	O.G. FIG.
BY	CLASS/USCLASS
DRAFTSMAN	

Fig. 3

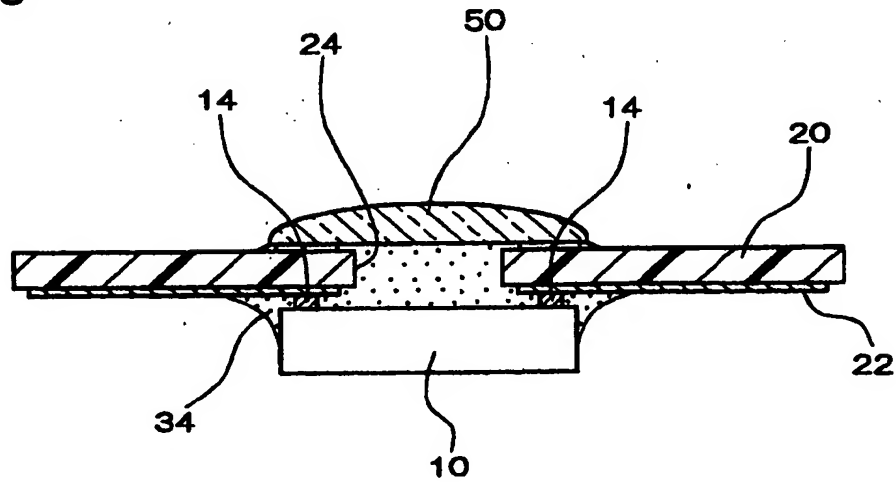


Fig. 4

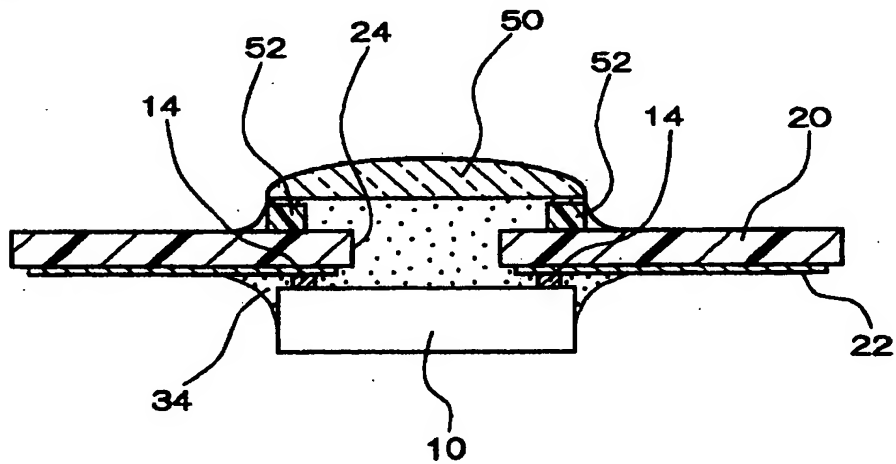


Fig. 5

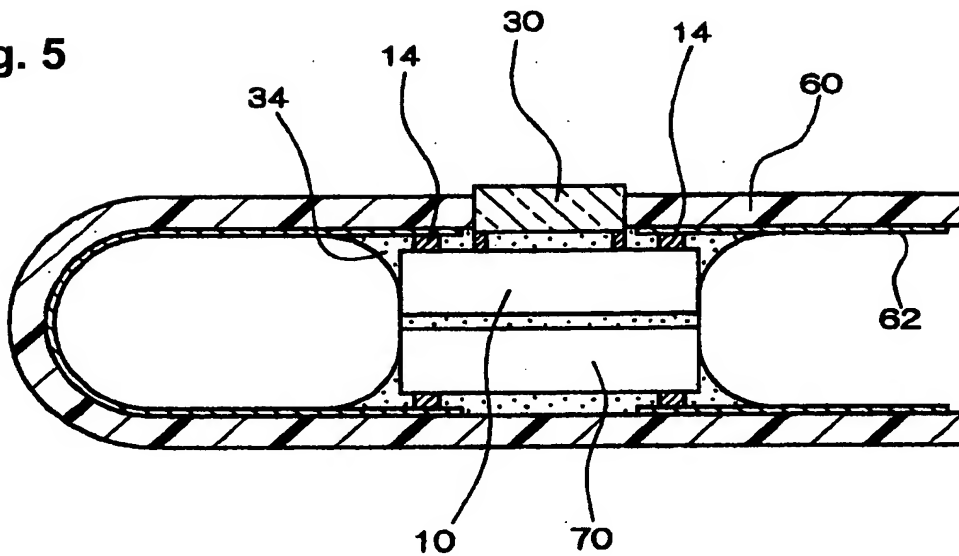


Fig. 6

